

Air -/ Water Heat Exchanger RK 2125 A-400V



Product Description

Order Number:	2125210
Colour:	RAL 7035
Protection category IP (IEC 60 529):	IP 54
Add-ons:	With solenoid valve part no. 2125200
Approvals:	CE
Customs tariff number:	84195000
Material housing:	Mild steel, powder coated

Technical data RK 2125 A-400V


Cooling capacity L35W10 (200 l/h):	2,50 kW @ 50 Hz
	2,55 kW @ 60 Hz
Cooling capacity L35W10 (500 l/h):	3,15 kW @ 50 Hz
	3,25 kW @ 60 Hz
Refrigerant:	Water, light oils or similar
Operating temperature range:	+1°C - +72°C
Max. air volume flow:	500 m ³ /h @ 50 Hz
	530 m ³ /h @ 50 Hz
Mounting:	Internal / External
Dimensions (H x W x D):	936 x 262 x 146.5 mm
Weight:	18 kg
Rated operating voltage / frequency:	380 - 415 V 50 Hz 3~
	400 - 460 V 60 Hz 3~
Rated current:	0.27 A / 0.33 A
Starting current:	0.54 A / 0.66 A
Power consumption:	150 W / 235W
Max. Working pressure water circuit:	10 bar
Water connection:	Rp 1/4" - inside thread with 2 connectors for pipe internal diameter of 10mm
Fuse rating:	3 x 3 A (T)
Connection:	Connection terminals

Click the graphics to download the originals.

More CAD graphics can be found on our [Products Downloads page](#).

> [Overview product group Air-Water Heat Exchangers](#)

Airflow diagram:

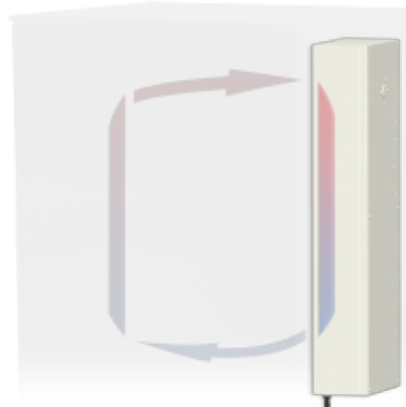

click image to enlarge

Cutout diagram:



click image to enlarge

[Datasheet](#) created 22.07.2015 (15:41:36). Technical rights reserved.